


DECKING INSTALLATION


The key to a long service life and an attractive appearance of terraces is quality boards and the correct method of their assembly. Advantage of full-profile TERAFFEST® boards is that they do not need to be anchored to the substrate in a complicated manner. The boards are quick and easy to assemble, which saves time and money. TERAFFEST® boards can be drilled, shortened or notched just like regular wood boards. A big advantage is that the composite can be bent after heating. This is an ideal feature for molding end strips into atypical curves and arches, especially near pools and hot tubs or around stairs.

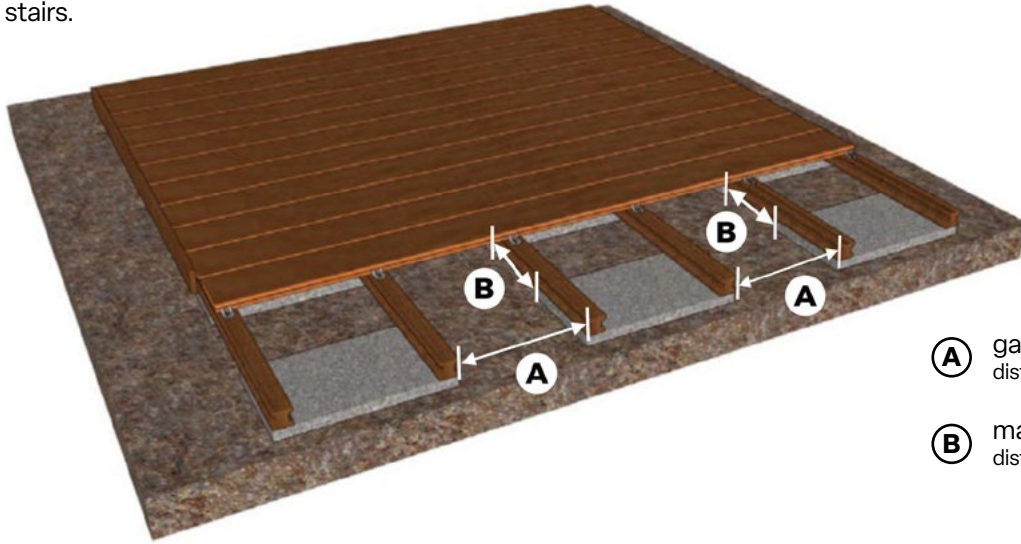


- A** gap between joists (edge to edge)
distance is different for each profile
- B** maximum unsupported part of joist
distance varies for different types of joists

DISTANCE BETWEEN JOISTS (A) + MATERIAL CONSUMPTION PER 1 SQM DECKING


137 Classic

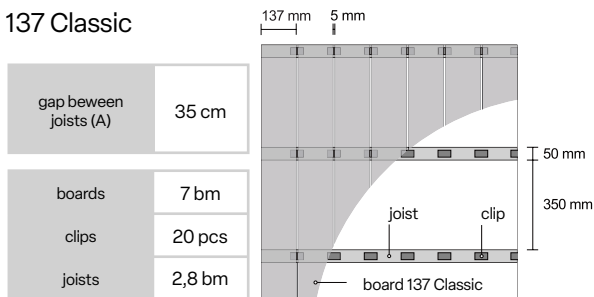

195 Max

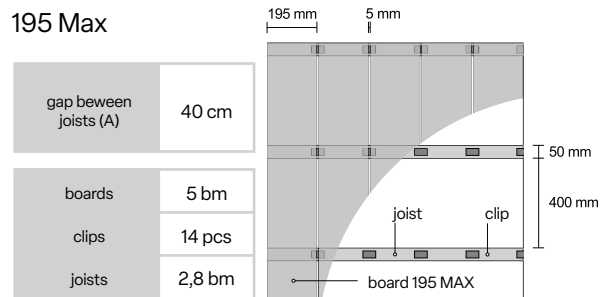

140 Infinitt

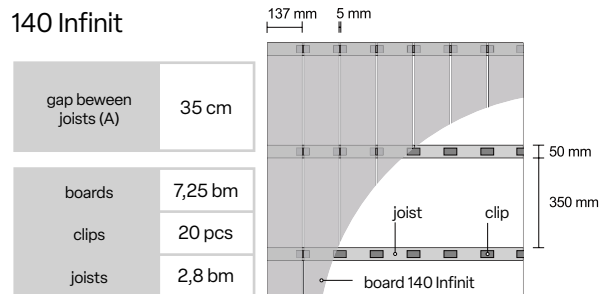

DECKING TERAFFEST INSTALLATION

UNDERLYING SURFACE



compacted gravel bed



hydroinsulation or concrete slab



other support structure

JOISTS INSTALLATION




MAX. UNSUPPORTED PART OF JOISTS (B)

WPC JOIST 50 × 30	15 cm
WPC JOIST 50 × 50	30 cm
AL - JOIST 25 × 35	40 cm
AL - JOIST 40 × 40	60 cm
AL - JOIST 75 × 40	100 cm



INSTALLATION VIDEO
<https://youtu.be/SlgX3mgcgSI>

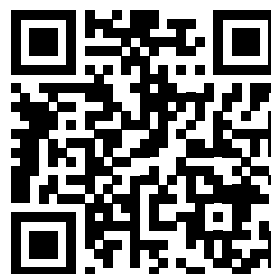

ASSEMBLY INSTRUCTIONS
<https://www.terafest.cz/ke-stazeni/>