



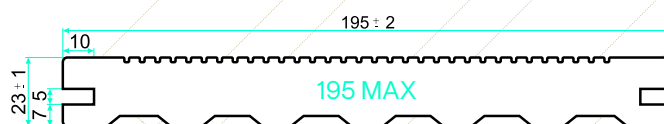

**DECKING TERAFEST  
GROOVE TEXTURE**

## PROFILES



## PROPERTIES

profile	dimensions	standard length	custom length	weight
137 Classic	137 × 23 mm	4 m	2 - 6 m	3,4 kg/bm
195 Max	195 × 23 mm	4 m	2 - 4 m	4,8 kg/bm

Dimensional tolerance: length +/- 10 mm; width +/- 2 mm; thickness +/- 1 mm.

## COLOUR OPTIONS





# GROOVE TEXTURE

## TECHNICAL PROPERTIES



### Technical properties according to ETA 23/0919\*

Basic characteristics	Standard	137 Classic Groove	195 Max Groove
Reaction to fire	ČSN EN 13501-1	C <sub>fi</sub> -s1	C <sub>fi</sub> -s1
Swelling in thickness	ČSN EN 317	2,4 %	2,4 %
Water absorption	ČSN EN 317	3 %	3 %
Bending strength	ČSN EN 310	28,6 MPa	30,4 MPa
Modulus of elasticity	ČSN EN 310	5114 Mpa	5205 Mpa
Impact strength	ČSN EN 477	20 J – pass	20 J – pass
Slipperiness Dry (parallel/perpendicular)	ČSN P CEN/TS 15676	80/98	80/98
Slipperiness Wet (parallel/perpendicular)	ČSN P CEN/TS 15676	52/72	52/72
Pull-through strength of the fasteners	ČSN EN 1383	2,71 MPa	2,71 MPa
Moisture resistance under cyclic conditions (decrease in strength and modulus of elasticity)	ČSN EN 321	6 % 14,1%	6,6 % 15,4 %
UV radiation – before ageing resistance – after ageing (1000h)	EN ISO 4892-2	2,58 kJ/m <sup>2</sup> 2,61 kJ/m <sup>2</sup>	2,58 kJ/m <sup>2</sup> 2,61 kJ/m <sup>2</sup>
Thermal expansion +30 až +80 °C	EAD čl.2.2.10	2,57*10 <sup>-5</sup> %	2,57*10 <sup>-5</sup> %
Surface hardness	ČSN EN 1534	30 N/mm <sup>2</sup>	30 N/mm <sup>2</sup>
Density	ČSN EN ISO 1183-1	1,21-1,24 g/cm <sup>3</sup>	1,21-1,24 g/cm <sup>3</sup>
Thermal conductivity	ČSN EN 12667	0,072 W/(m*K)	0,072 W/(m*K)

\* European Technical Assessment No. ETA 23/0919 of 21/12/2023 issued by Technical and Test Institute for construction Prague, on the basis of European Assessment Document EAD 190005-00-0402.

### Other technical properties

Characteristics	Standard	137 Classic Groove	195 Max Groove
Antistatic properties	ČSN EN 1815	0,22/0,17 kV - pass	0,22/0,17 kV - pass
Anti-slip classification	DIN 51130	R11	R11
Migration of certain elements (Category III)	ČSN EN 71-3+A1	pass	pass
Formaldehyde emissions	ČSN EN 717-1	< 0.028 mg/m <sup>3</sup> pass	< 0.028 mg/m <sup>3</sup> pass